








Type N1

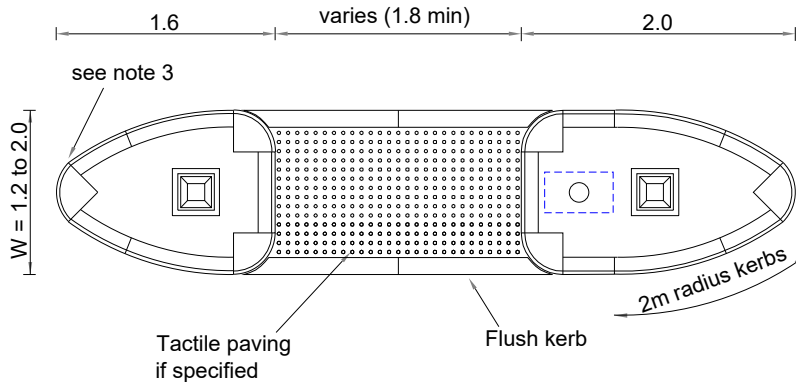

Type N2

Key

-  Base illuminated bollard see Drg No SD/12/19B & 20B
-  Refuge beacon (see note 6 & 7)
-  Flush kerb
-  Dropper kerb
-  Quadrant
-  HB kerb

NOTES:

1. All dimensions are in millimetres unless otherwise stated.
2. 305mm x 255mm quadrants to be used on nosings.
3. The end of the 2m radius kerbs to be cut to suit the width of the refuge and to ensure a flush joint with quadrant
4. Type HB (half battered) kerbs to be used with 125mm kerb face except where stated.
5. Refuges to be surfaced with the standard footway construction as per Drg No SD/11/5A. Base course regulating material to be used in lieu of sub-base when refuges are constructed in existing surfaces.
6. Refuge beacon to be in accordance with the ' traffic signs manual ' (chapter 4).
7. On certain designated abnormal load routes the refuge beacon shall be mounted in a ' poletech ' unit or similar equivalent system approved by the street lighting section.
8. The width of the flush kerbs shall correspond to the width of the adjacent footway or cycleway.

Rev.	Description	Drawn	Ch'kd	Auth	Date



in partnership with



**Nottinghamshire
County Council**

www.viaem.co.uk Tel 0115 804 2100

Bilsthorpe Depot, Bilsthorpe Business Park, Bilsthorpe,
Nottinghamshire, NG22 8ST

Project		Highway Construction Details			Project	Drawn	Date
Status	Project No.	Kerbs, Footways And Pavings			JLS	JLS	18/06/2020
Drawing Title		Narrow Refuge Islands with Pedestrian Facilities			JD	JD	31/07/20
Drawing No.		SD/11/23a			JP	JP	JLS
					0	0	N.T.S @A4